# MARC

## Concealed runners for wooden drawers

INDAUX
Smart Simplicity

1962 50 2012

INDAmatic
GRADUAL CLOSING

# MARC

## Concealed runners for wooden drawers

Pin or clip mounting.
Single or full extension.
Gravity self-closing or spring self-closing or indamatic soft closing or IMPULSE reverse opening.

1 MARC RUNNERS: SINGLE EXTENSION ..... 386

■ Gravity Self-Closing ..... 386
> Plastic roller-bearing.
> Pin or clip-mounting. 3mm height adjustment.
> Lengths from 250 to 650mm.

■ Gravity Self-Closing + **IMPULSE** Reverse opening premounted ..... 388
> Plastic roller-bearing "IMPULSE" reverse opening premounted.
> Pin or clip-mounting. 3mm height adjustment.
> Lengths from 250 to 650mm.

■ Direct Self-Closing ..... 390
> Plastic roller-bearing. Spring-Closing.
> Pin or clip-mounting. 3mm height adjustment.
> Lengths from 250 to 650mm.

■ **INDAMATIC** Gradual Soft-Closing ..... 392
> Plastic roller-bearing.
> Pin or clip-mounting. 3mm height adjustment.
> Lengths from 250 to 650mm.
> Spring Self-Closing + Soft-Closing.

2 MARC RUNNERS: FULL EXTENSION ..... 394

■ Direct Self-Closing ..... 394
> Full extension runner. Spring Self-Closing.
> Metal roller-bearing.
> Pin or clip-mounting. 3mm height adjustment.
> Lengths from 300 to 600m.

■ **INDAMATIC** Gradual Soft-Closing ..... 396
> Full extension runner with Indamatic gradual closing system.
> Metal roller-bearing.
> Pin or clip-mounting. 3mm height adjustment.
> Lengths from 350 to 650mm.

# 1 MARC RUNNERS: SINGLE EXTENSION

## Gravity Self-Closing

Plastic roller-bearing.
Pin or clip-mounting. 3mm height adjustment.
Lengths from 250 to 650mm.

Single extension, gravity self-closing. Pin mounting.

| Load | Drawer length | Reference | Extension loss | C | |
|---|---|---|---|---|---|
| | 250 | 766.525.034 | 62 | 180 | |
| | 300 | 766.530.030 | 62 | 205 | |
| | 350 | 766.535.033 | 62 | 230 | |
| | 400 | 766.540.036 | 82 | 265 | |
| 25Kp | 450 | 766.545.032 | 82 | 290 | 24 |
| | 500 | 766.550.035 | 104 | 325 | |
| | 550 | 766.555.031 | 104 | 350 | |
| | 600 | 766.560.034 | 104 | 375 | |
| | 650 | 766.565.030 | 104 | 400 | |

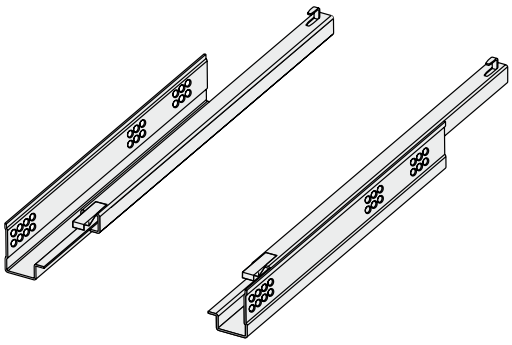

*Drilling Pattern*

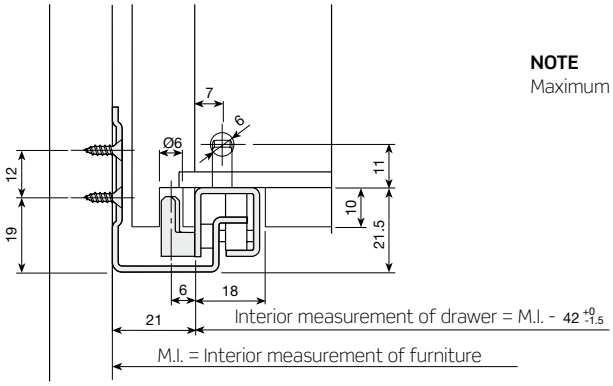


**NOTE**
Maximum drawer thickness 18mm

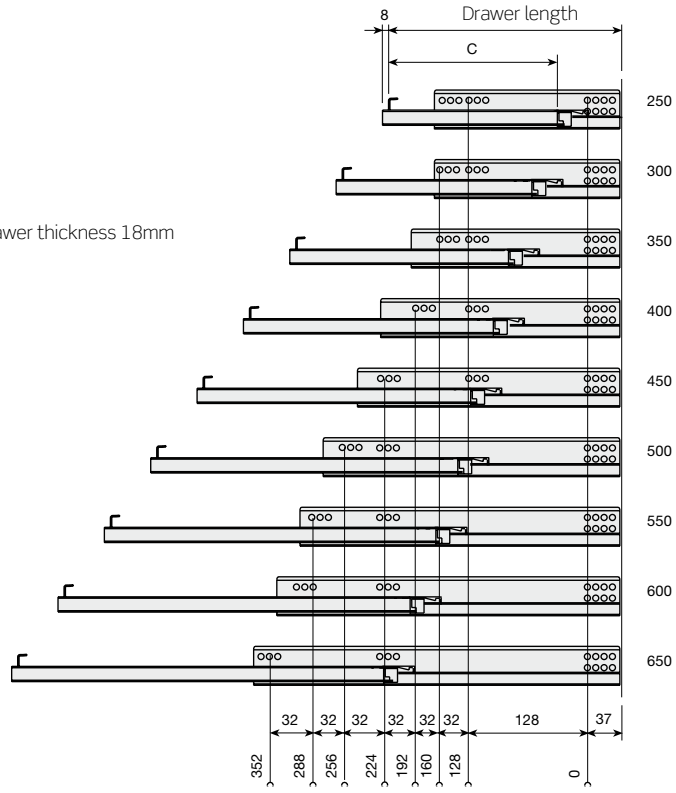


*Assembly & Adjustment*

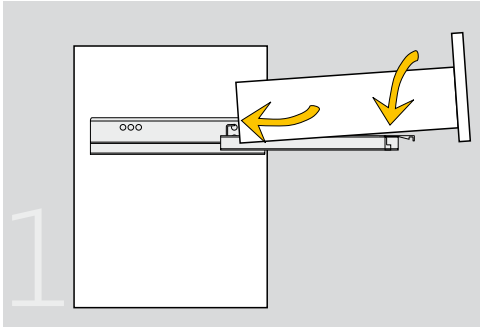


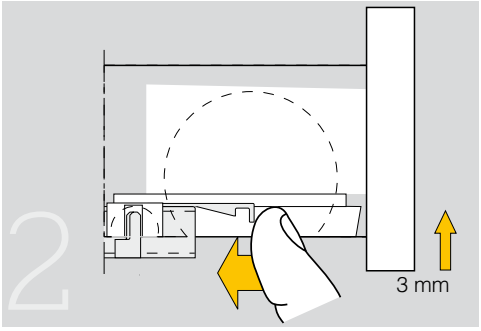

## Gravity Self-Closing

Single extension, gravity self-closing. Clip-mounting.

| Load | Drawer length | Reference | Extension loss | L | |
|---|---|---|---|---|---|
| | 250 | 766.425.030 | 62 | 0 | |
| | 300 | 766.430.033 | 62 | 30 | |
| | 350 | 766.435.036 | 62 | 55 | |
| | 400 | 766.440.032 | 82 | 70 | |
| 25Kp | 450 | 766.445.035 | 82 | 95 | 24 |
| | 500 | 766.450.031 | 104 | 110 | |
| | 550 | 766.455.034 | 104 | 135 | |
| | 600 | 766.460.030 | 104 | 160 | |
| | 650 | 766.465.033 | 104 | 185 | |

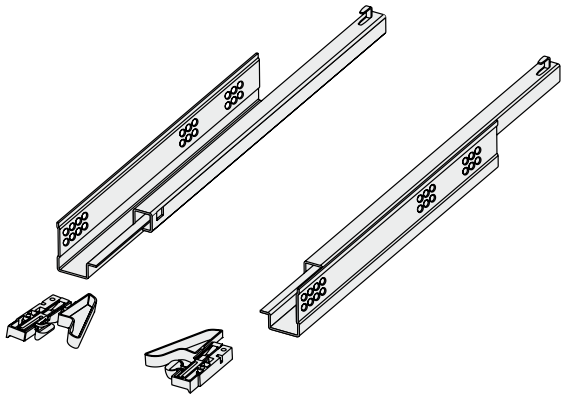

Clip-on brackets.

| | set | |
|---|---|---|
| | 731.245.104 | 100 |

*Drilling Pattern*

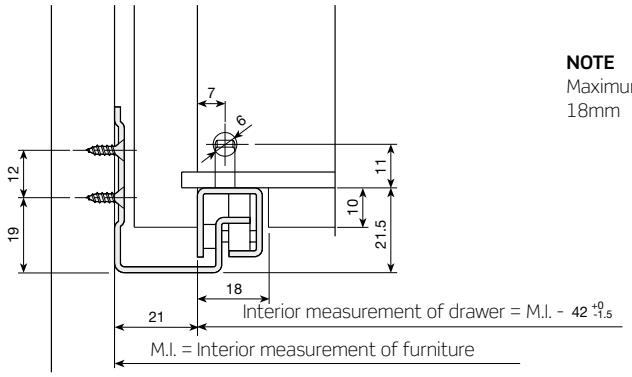


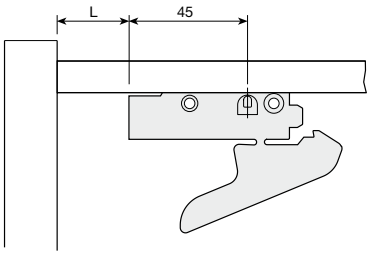


**NOTE**
Maximum drawer thickness
18mm

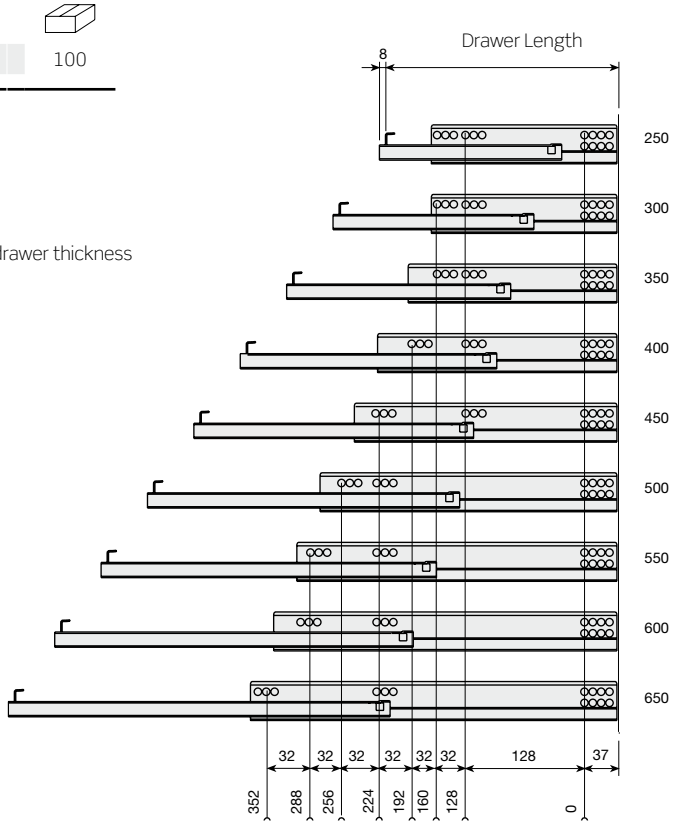


*Assembly & Adjustment*

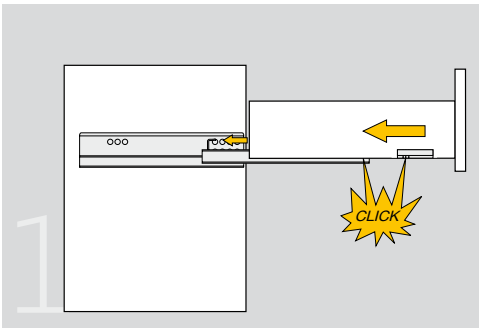


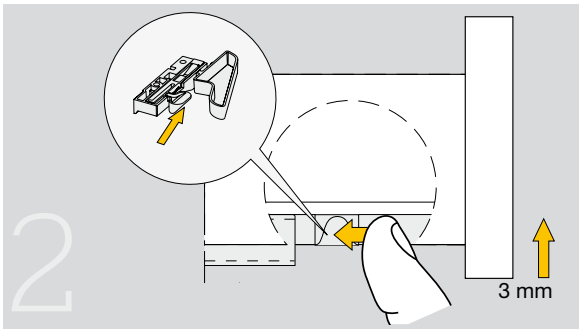

# Gravity Self-Closing + **IMPULSE** reverse opening premounted. Pin mounting

Single extension, gravity self-closing. Pin mounting.

| Load | Drawer length | Reference | Extension loss | C | |
|---|---|---|---|---|---|
| | 250 | 766.125.032 | 62 | 180 | |
| | 300 | 766.130.035 | 62 | 205 | |
| | 350 | 766.135.031 | 62 | 230 | |
| | 400 | 766.140.034 | 82 | 265 | |
| 25Kp | 450 | 766.145.030 | 82 | 290 | 24 |
| | 500 | 766.150.033 | 104 | 325 | |
| | 550 | 766.155.036 | 104 | 350 | |
| | 600 | 766.160.032 | 104 | 375 | |
| | 650 | 766.165.035 | 104 | 400 | |

The set is made up of the runner, 1 base and 1 push-latch.

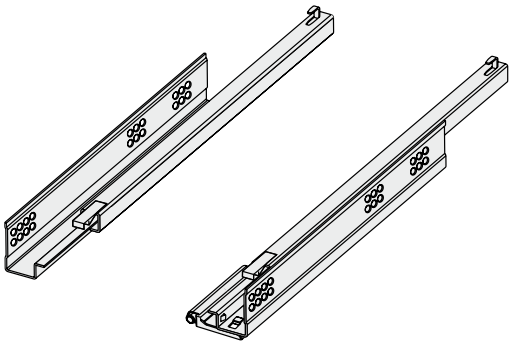

**NOTE**
> **IMPULSE** reverse opening push-latch delivered unassembled
> Maximum drawer thickness 18mm

## *Drilling Pattern*

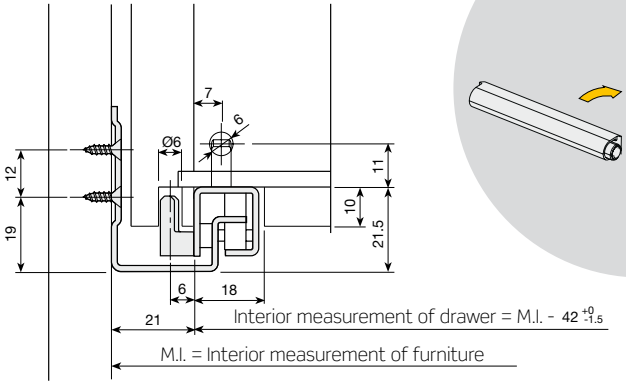


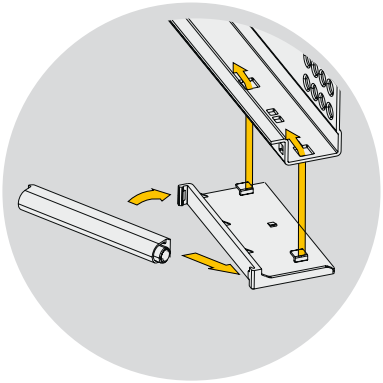

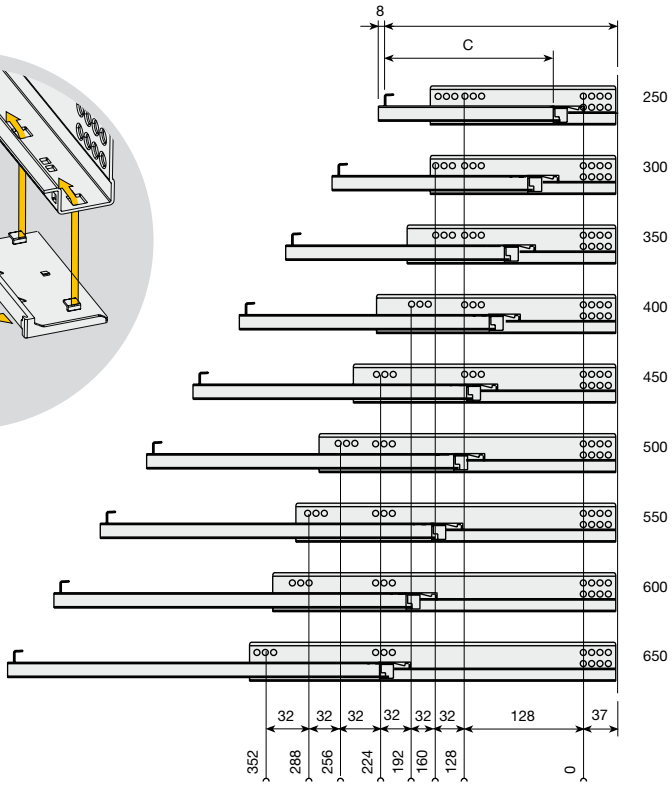


## *Assembly & Adjustment*

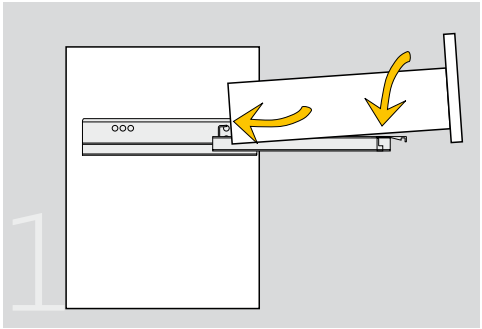


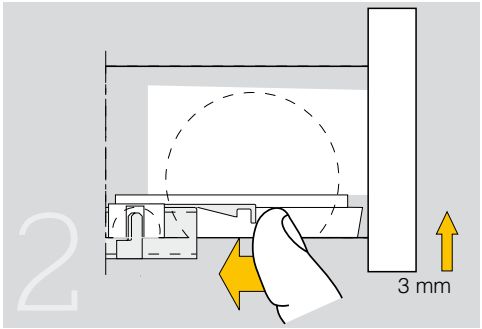

# Gravity Self-Closing + **IMPULSE** reverse opening premounted. Clip mounting

## Single extension, gravity self-closing. Clip-on mounting.

| Load | Drawer length | Reference | Extension loss | L | |
|---|---|---|---|---|---|
| | 250 | 766.025.035 | 62 | 0 | |
| | 300 | 766.030.031 | 62 | 30 | |
| | 350 | 766.035.034 | 62 | 55 | |
| | 400 | 766.040.030 | 82 | 70 | |
| 25Kp | 450 | 766.045.033 | 82 | 95 | 24 |
| | 500 | 766.050.036 | 104 | 110 | |
| | 550 | 766.055.032 | 104 | 135 | |
| | 600 | 766.060.035 | 104 | 160 | |
| | 650 | 766.065.031 | 104 | 185 | |

The set is made up of the runner, 1 base and 1 push-latch.

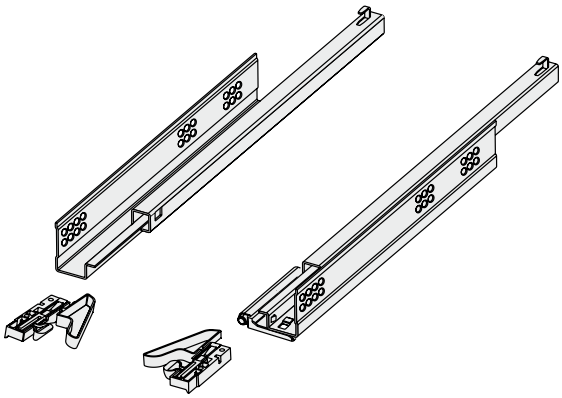

## Clip-on brackets.

| | Set | |
|---|---|---|
| | 731.245.104 | 100 |

**NOTE**
> **IMPULSE** reverse opening push-latch delivered unassembled
> Maximum drawer thickness 18mm

### *Drilling Pattern*

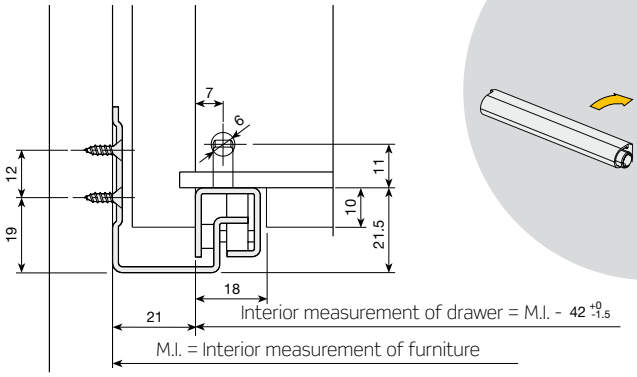


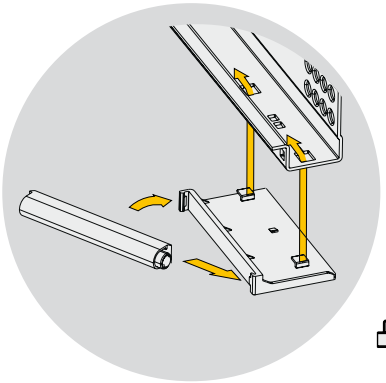

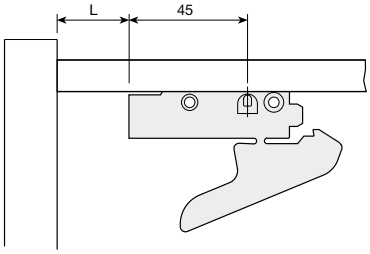


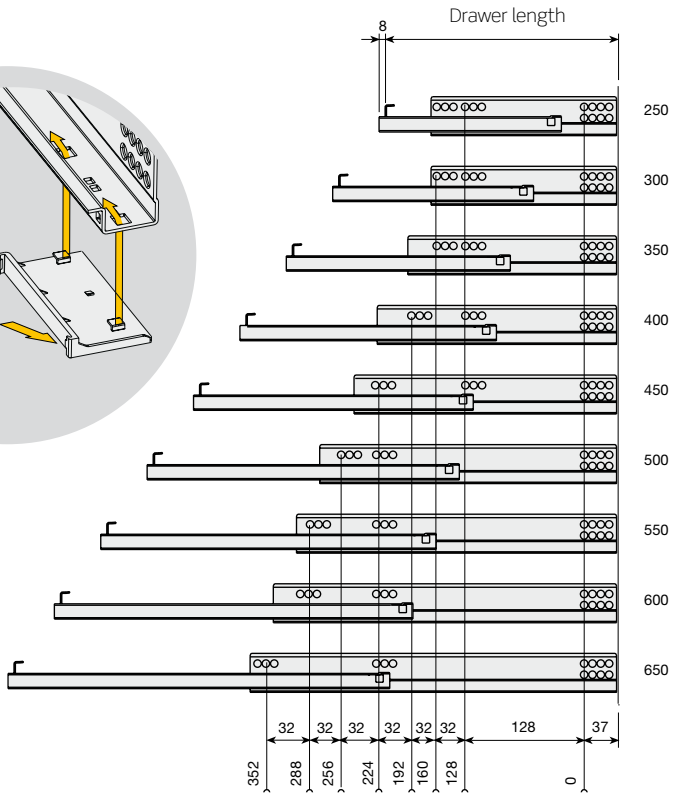


### *Assembly & Adjustment*

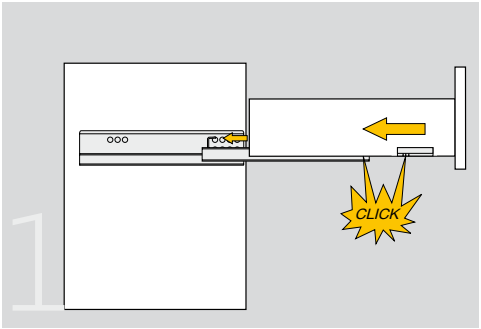


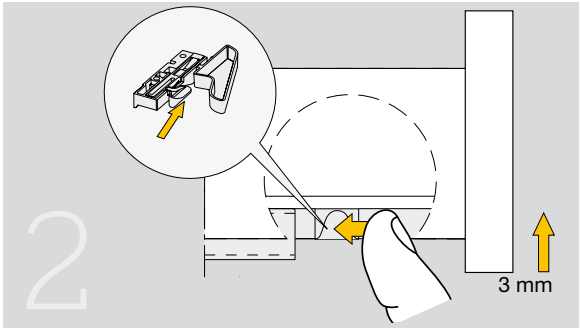

# Direct Self-Closing. Pin mounting

Single extension, self-closing. Pin mounting.

| Load | Drawer length | Reference | Extension loss | C | |
|---|---|---|---|---|---|
| 25Kp | 300 | 769.630.035 | 62 | 260 | 24 |
| | 350 | 769.635.031 | 62 | 310 | |
| | 400 | 769.640.034 | 82 | 330 | |
| | 450 | 769.645.030 | 82 | 355 | |
| | 500 | 769.650.033 | 104 | 395 | |
| | 550 | 769.655.036 | 104 | 420 | |
| | 600 | 769.660.032 | 104 | 445 | |
| | 650 | 769.665.035 | 104 | 470 | |

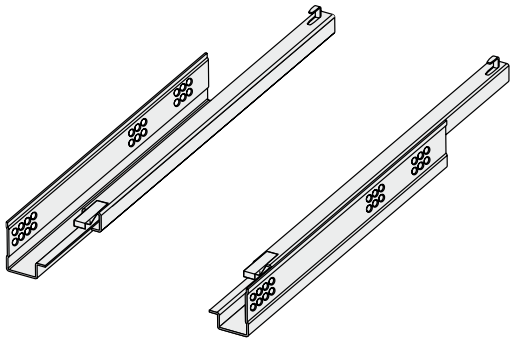

*Drilling pattern*

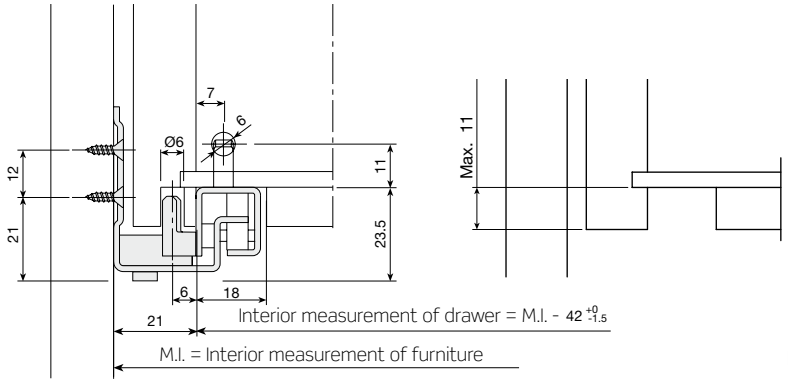


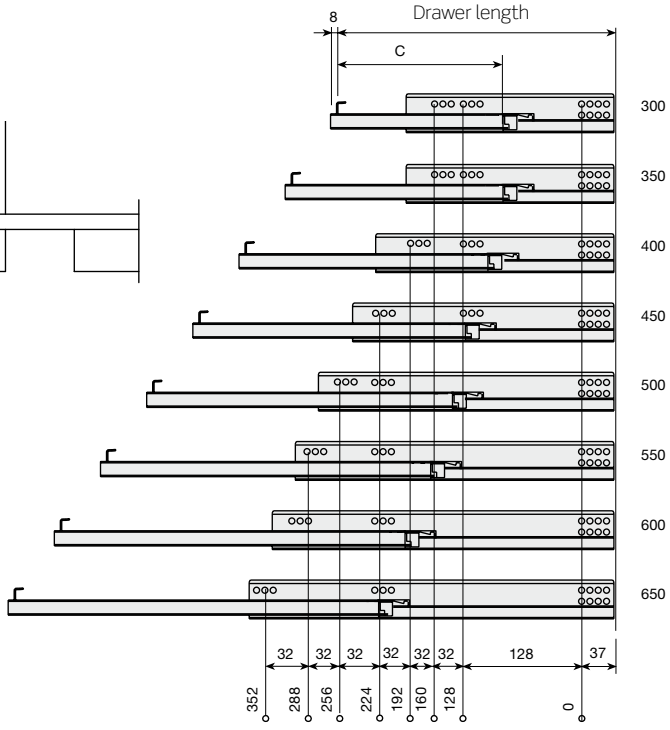


**NOTE**
Maximum drawer thickness 18mm

*Assembly & Adjustment*

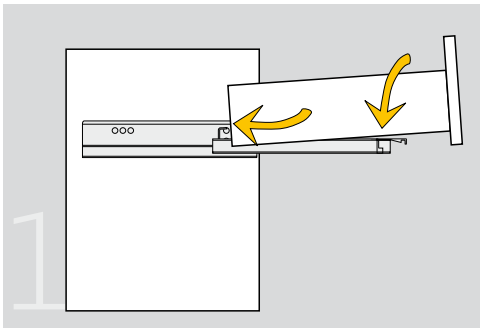


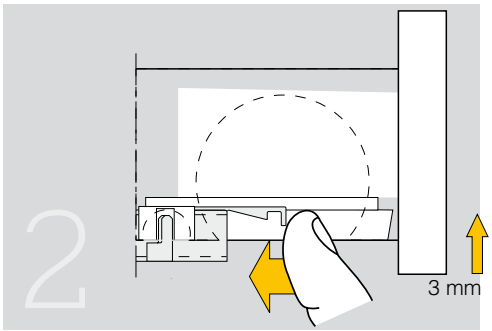

# Direct Self-Closing. Clip mounting

Single extension, self-closing. Clip-mounting.

| Load | Drawer length | Reference | Extension loss | L | |
|---|---|---|---|---|---|
| 25Kp | 300 | 769.430.034 | 62 | 0 | 24 |
| | 350 | 769.435.030 | 62 | 25 | |
| | 400 | 769.440.033 | 82 | 40 | |
| | 450 | 769.445.036 | 82 | 65 | |
| | 500 | 769.450.032 | 104 | 80 | |
| | 550 | 769.455.035 | 104 | 105 | |
| | 600 | 769.460.031 | 104 | 130 | |
| | 650 | 769.465.034 | 104 | 155 | |

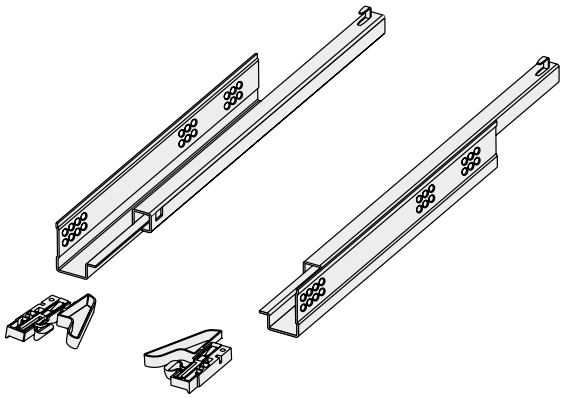

Clip-on brackets.

| | Set | |
|---|---|---|
| | 731.245.104 | 100 |

*Drilling pattern*

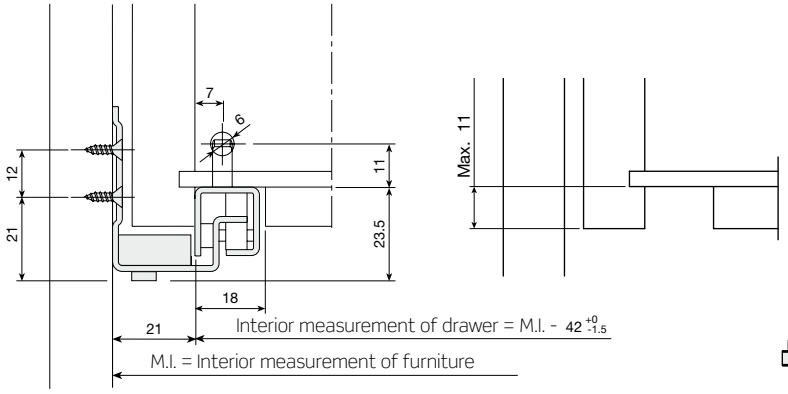


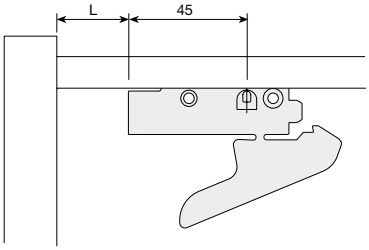


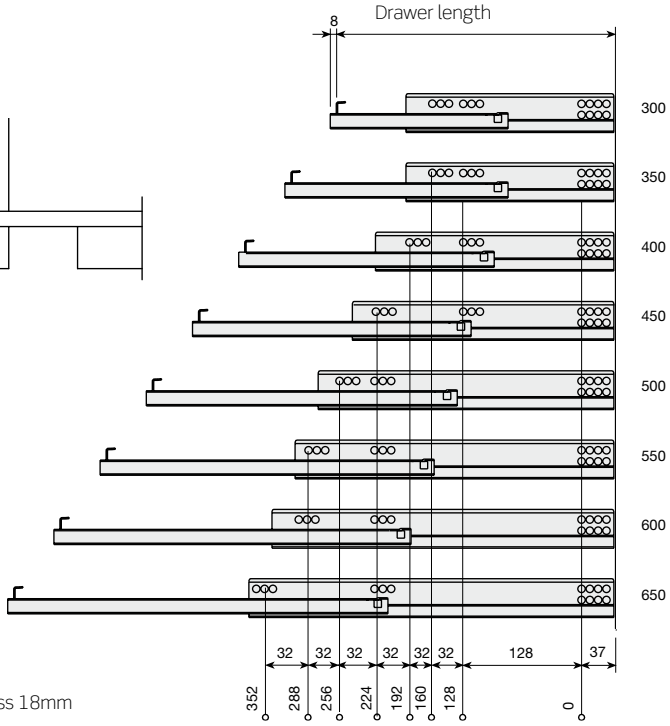


**NOTE**
Maximum drawer thickness 18mm

*Assembly & Adjustment*

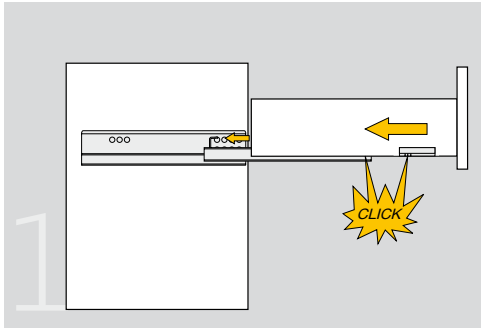


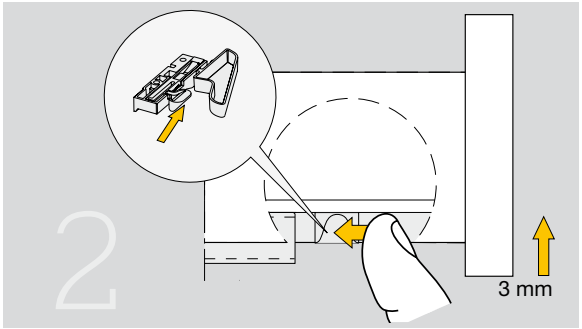

## Gradual Soft-Closing. Pin mounting

INDAmatic

Plastic roller-bearing.
Pin or clip-mounting. 3mm height adjustment.
Lengths from 350 to 650mm.

Single extension, gradual soft-closing. Pin mounting.

| Load | Drawer length | Reference | Extension loss | C | |
|---|---|---|---|---|---|
| 25Kp | 300 | 769.730.032 | 62 | 260 | 24 |
| | 350 | 769.735.035 | 62 | 310 | |
| | 400 | 769.740.031 | 82 | 330 | |
| | 450 | 769.745.034 | 82 | 355 | |
| | 500 | 769.750.030 | 104 | 395 | |
| | 550 | 769.755.033 | 104 | 420 | |
| | 600 | 769.760.036 | 104 | 445 | |
| | 650 | 769.765.032 | 104 | 470 | |

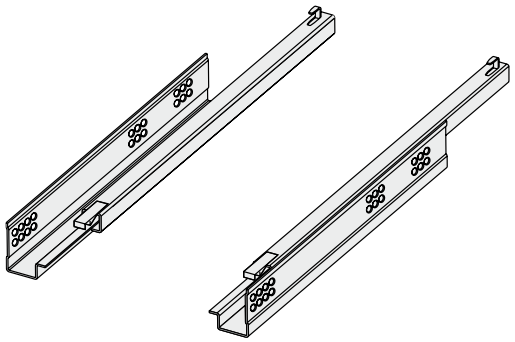

*Drilling pattern*

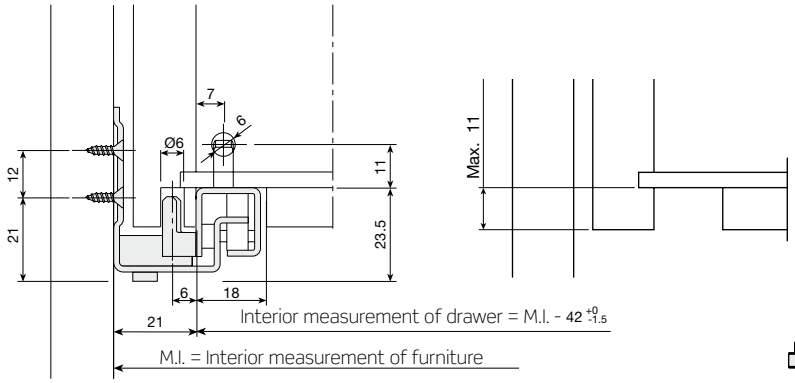


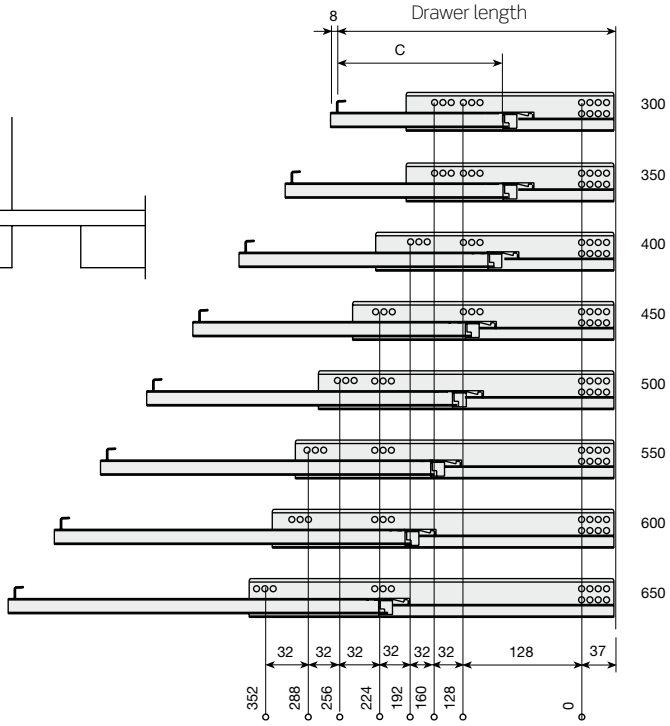


**NOTE**
Maximum drawer thickness 18mm

*Assembly & Adjustment*

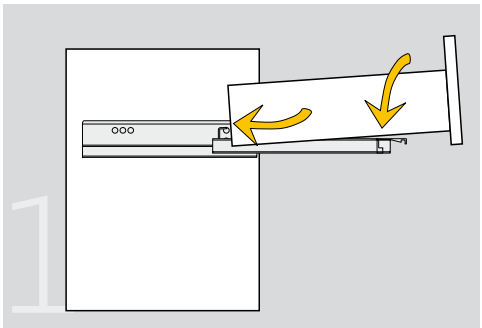


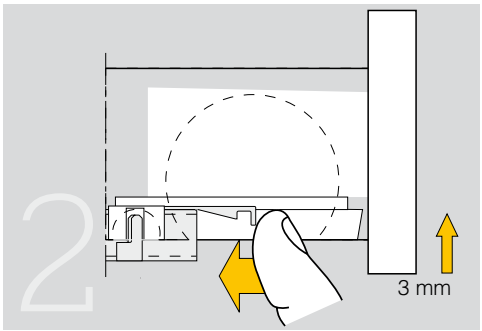

## Gradual Soft-Closing. Clip mounting

INDAmatic

Single extension, clip-mounting. INDAMATIC.

| Load | Drawer length | Reference | Extension loss | L | |
|---|---|---|---|---|---|
| 25Kp | 300 | 769.530.031 | 62 | 0 | 24 |
| | 350 | 769.535.034 | 62 | 25 | |
| | 400 | 769.540.030 | 82 | 40 | |
| | 450 | 769.545.033 | 82 | 65 | |
| | 500 | 769.550.036 | 104 | 80 | |
| | 550 | 769.555.032 | 104 | 105 | |
| | 600 | 769.560.035 | 104 | 130 | |
| | 650 | 769.565.031 | 104 | 155 | |

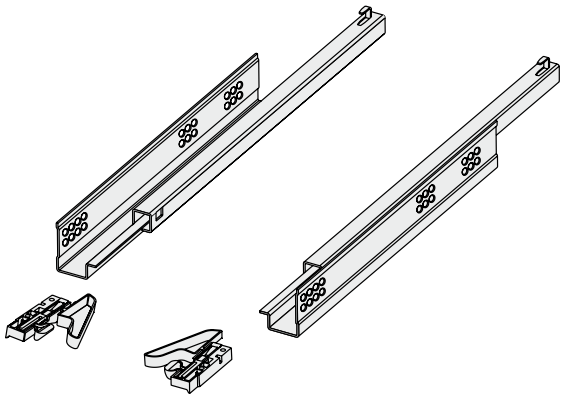

Clip-on brackets

| | Set | |
|---|---|---|
| | 731.245.104 | 100 |

*Drilling pattern*

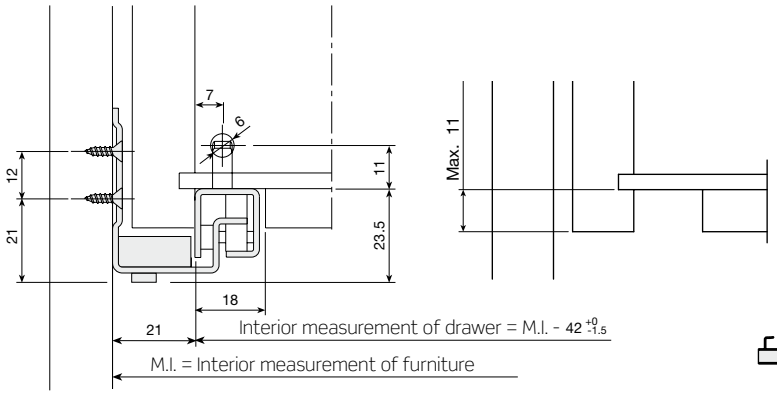


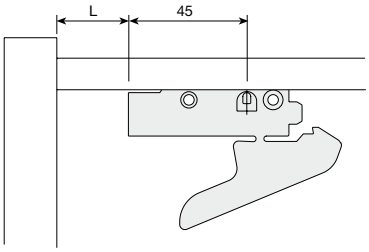


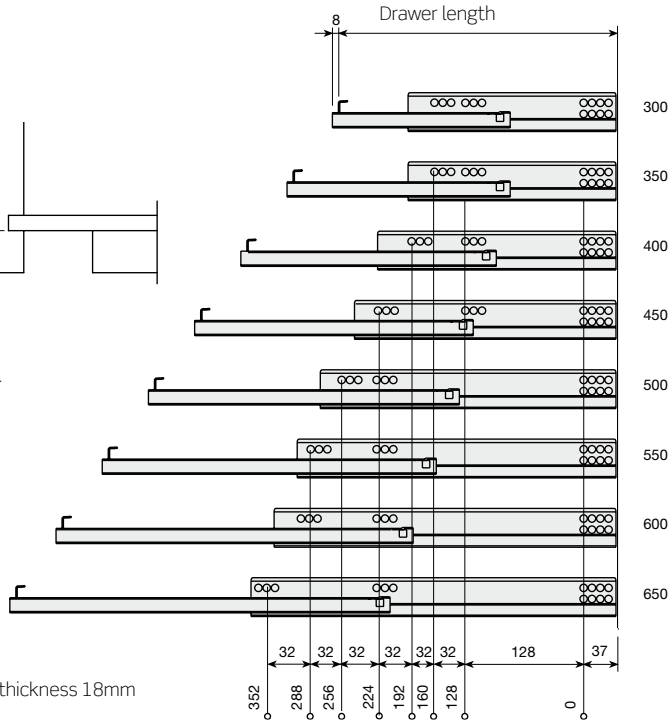


**NOTE**
Maximum drawer thickness 18mm

*Assembly & Adjustment*

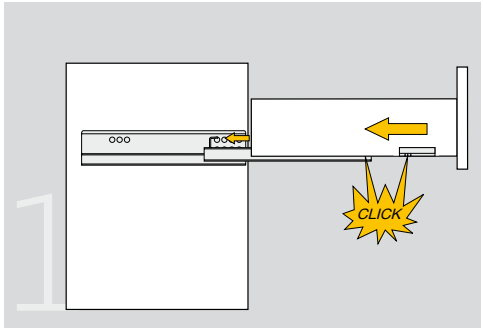


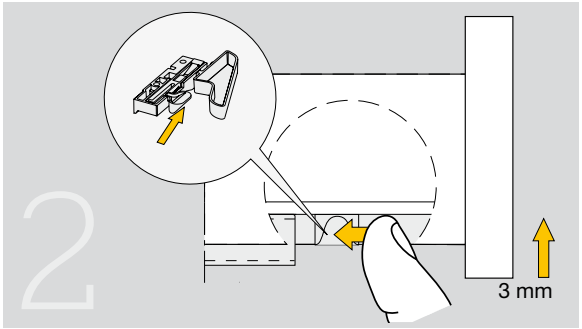

# 2 MARC RUNNERS: FULL EXTENSION

## Direct Self-Closing. Pin mounting

Metal roller-bearing.
Pin or clip-mounting. 3mm height adjustment.
Lengths from 300 to 650mm.
Spring self-closing.

Full extension, self-closing. Pin mounting.

| Load | Drawer length | Reference | Extension loss | C | |
|---|---|---|---|---|---|
| | 300 | 762.630.035 | 0 | 281 | |
| | 350 | 762.635.031 | 0 | 331 | |
| | 400 | 762.640.034 | 0 | 381 | 20 |
| 25Kp | 450 | 762.645.030 | 0 | 431 | |
| | 500 | 762.650.033 | 0 | 481 | |
| | 550 | 762.655.036 | 0 | 531 | |
| | 600 | 762.660.032 | 0 | 581 | |

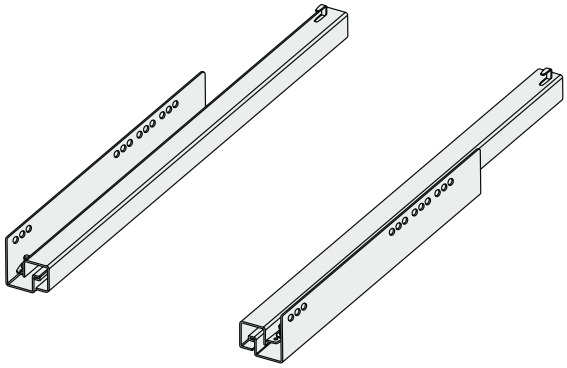

*Drilling Pattern*

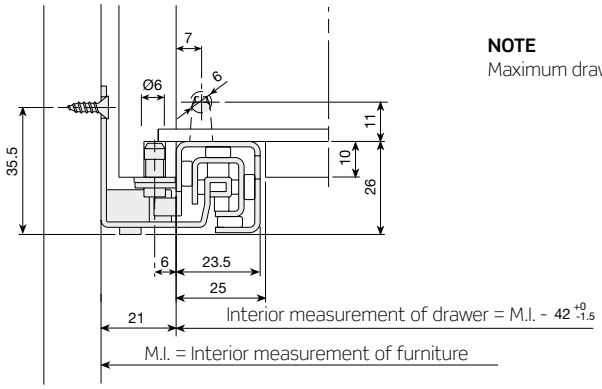


**NOTE**
Maximum drawer thickness 18mm

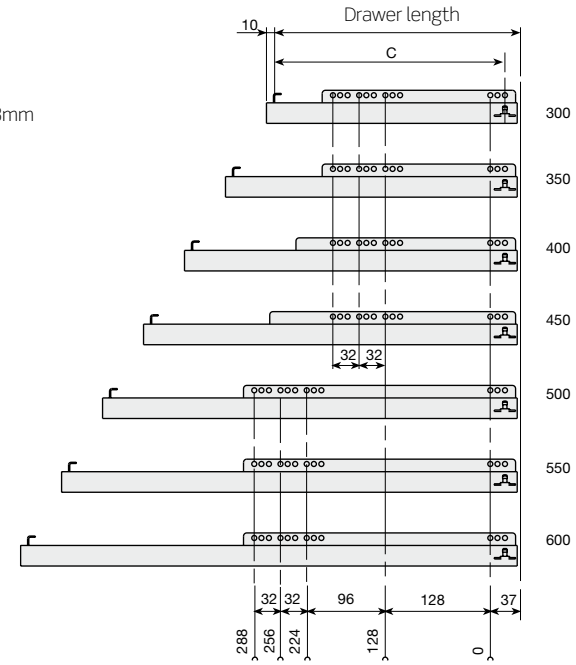


*Assembly & Adjustment*

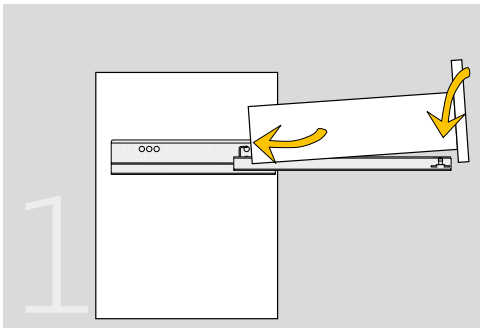

## Direct Self-Closing. Clip mounting

Full extension, self-closing. Clip-mounting.

| Load | Drawer length | Reference | Extension loss | |
|---|---|---|---|---|
| 25Kp | 300 | 763.030.030 | 0 | 20 |
| | 350 | 763.035.033 | 0 | |
| | 400 | 763.040.036 | 0 | |
| | 450 | 763.045.032 | 0 | |
| | 500 | 763.050.035 | 0 | |
| | 550 | 763.055.031 | 0 | |
| | 600 | 763.060.034 | 0 | |

Clip-on brackets.

| | Set | |
|---|---|---|
| | 731.245.104 | 100 |

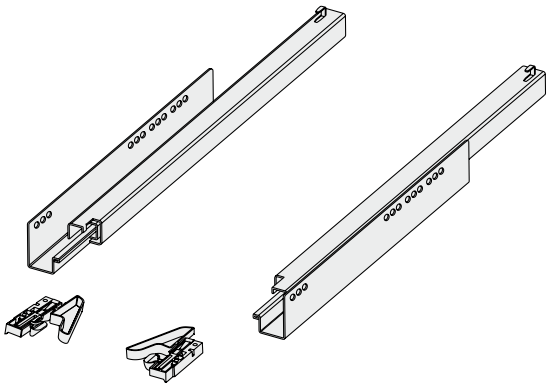

*Drilling pattern*

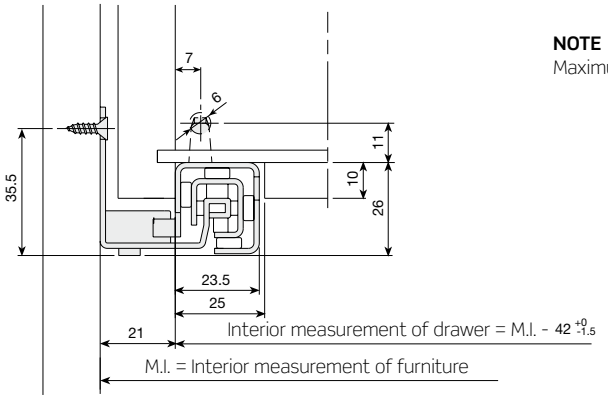





**NOTE**
Maximum drawer thickness 18mm

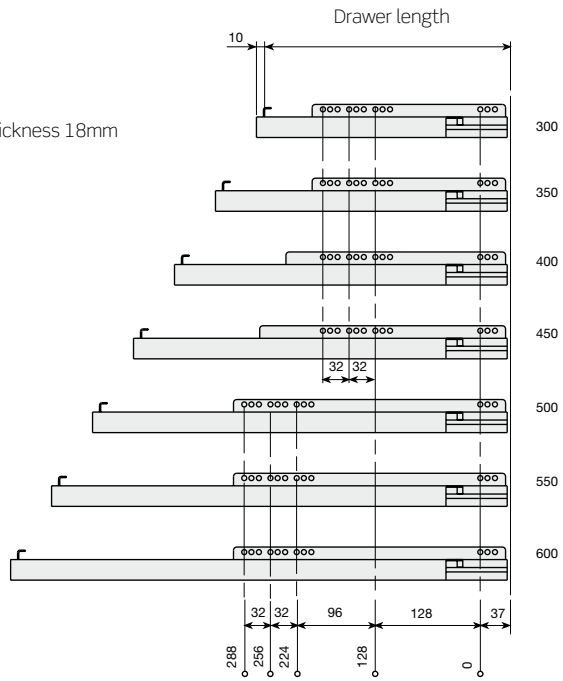


*Assembly & Adjustment*

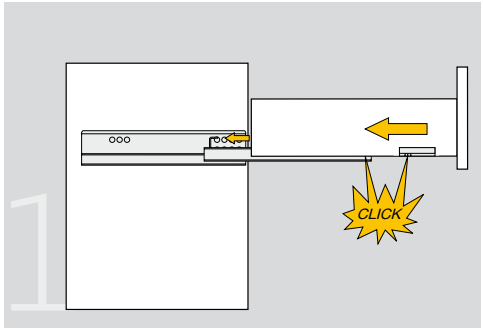


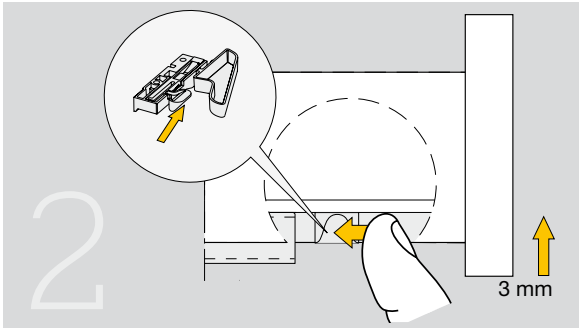

## Gradual Soft-Closing. Pin mounting

INDAmatic

Metal roller-bearing.
Pin or clip-mounting. 3mm height adjustment.
Lengths from 300 to 600mm.

Full extension, soft-closing. Pin mounting. INDAMATIC.

| Load | Drawer length | Reference | Extension loss | C | |
|---|---|---|---|---|---|
| | 300 | 762.730.032 | 0 | 281 | |
| | 350 | 762.735.035 | 0 | 331 | |
| | 400 | 762.740.031 | 0 | 381 | 20 |
| 25Kp | 450 | 762.745.034 | 0 | 431 | |
| | 500 | 762.750.030 | 0 | 481 | |
| | 550 | 762.755.033 | 0 | 531 | |
| | 600 | 762.760.036 | 0 | 581 | |

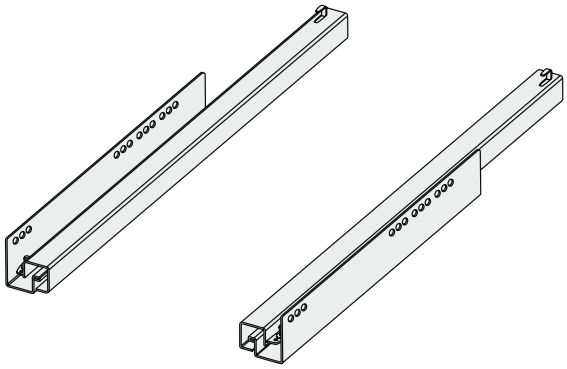

*Drilling pattern*

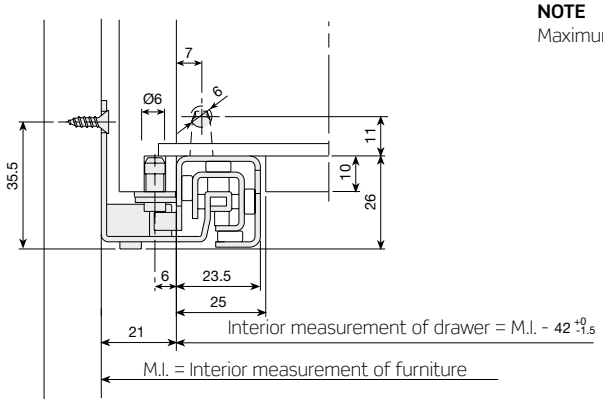


**NOTE**
Maximum drawer thickness 18mm

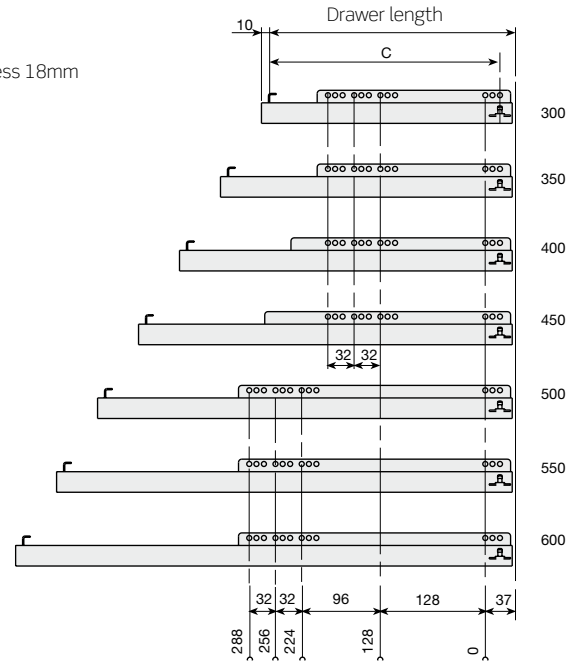


*Assembly & Adjustment*

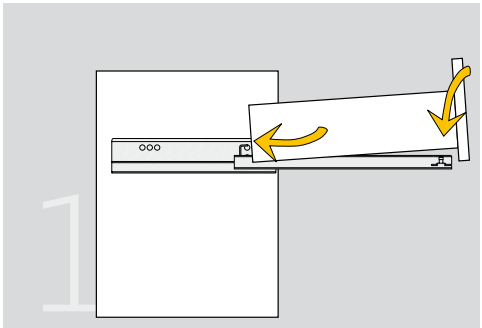


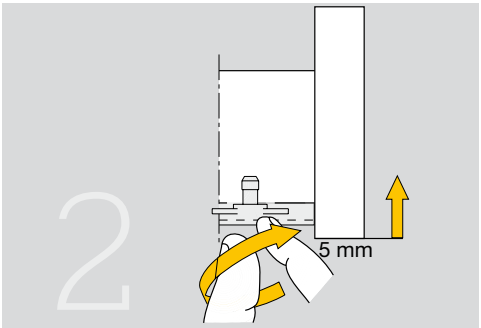

## Gradual Soft-Closing. Clip mounting

INDAmatic

Full extension, soft-Closing. Clip-mounting. INDAMATIC.

| Load | Drawer length | Reference | Extension loss | |
|---|---|---|---|---|
| 25Kp | 300 | 763.130.034 | 0 | 20 |
| | 350 | 763.135.030 | 0 | |
| | 400 | 763.140.033 | 0 | |
| | 450 | 763.145.036 | 0 | |
| | 500 | 763.150.032 | 0 | |
| | 550 | 763.155.035 | 0 | |
| | 600 | 763.160.031 | 0 | |

Clip-on brackets.

| | set | |
|---|---|---|
| | 731.245.104 | 100 |

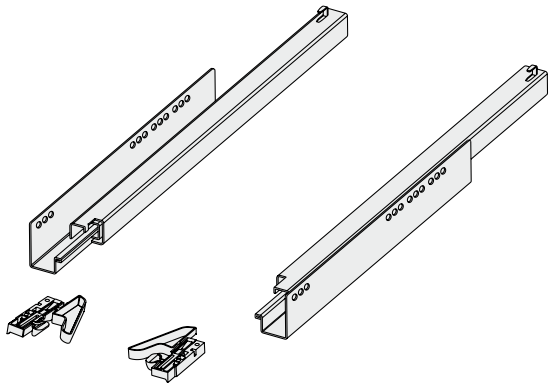

*Drilling pattern*

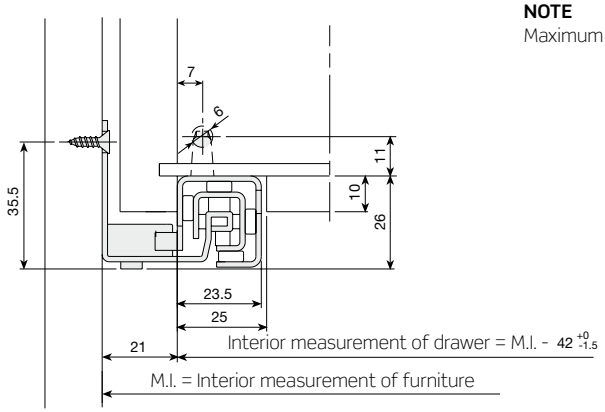





**NOTE**
Maximum drawer thickness 18mm

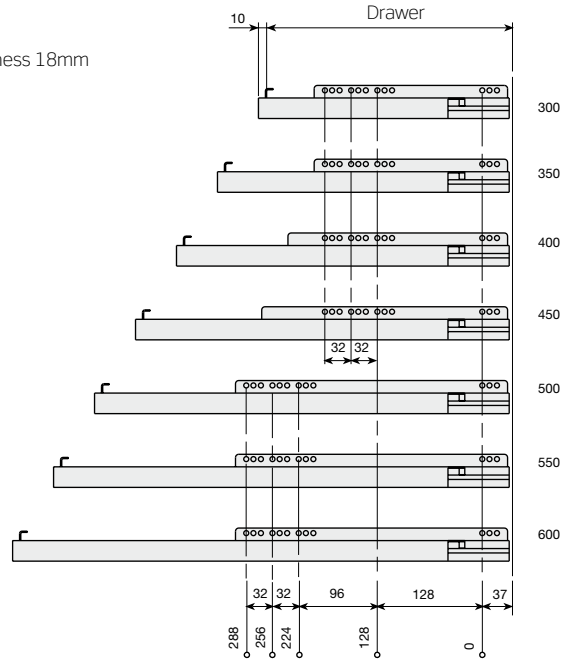

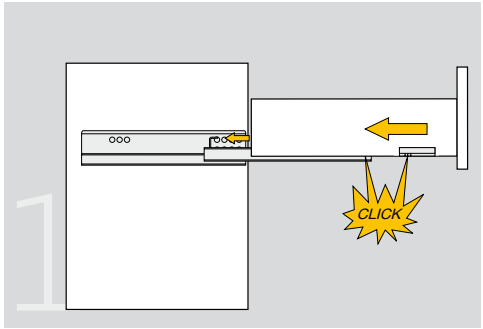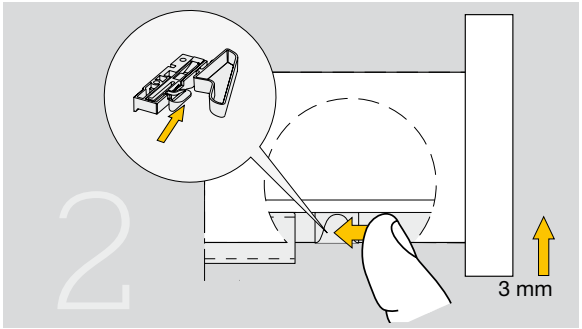
*Assembly & Adjustment*